


- Technical Requirement
- Static load: 4000kg (three pole); 1333kg (single pole);
Dynamic load: Horizontal direction 22000N;
Vertical direction (upward) 30000N,
Vertical direction (down) 50000N.
 - The surface levelness of concrete is not greater than 1.5mm²

Base Drawing

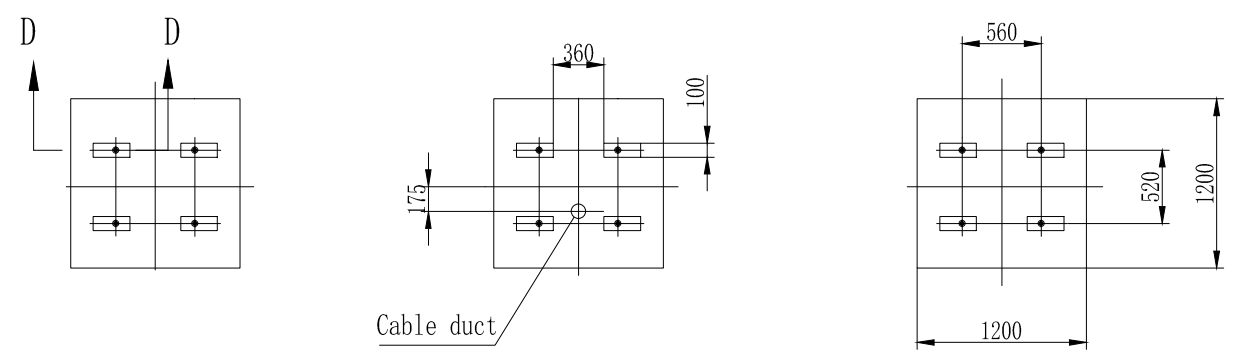

For Reference Only

ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE NOTED					 3RD ANGLE PROJECTION		LW43-252		CHINT CHINT ELECTRIC Power Transmission & Distribution 3255 Sixian Road Songjiang District 201614 Shanghai, China Tel: +86 21 6777 7777 Fax: +86 21 6777 7999		Outline and Foundation Drawing of 252kV Circuit Breaker -monopolar		Designed _____ Checked _____ Approved _____		Scale _____ Page _____ Date _____		DRAWING NUMBER _____ Rev. 1	
1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8			